


INDOOR TYPE CAT-5E F/UTP 24 AWG LSZH SHEATH

1. CABLE CONSTRUCTION

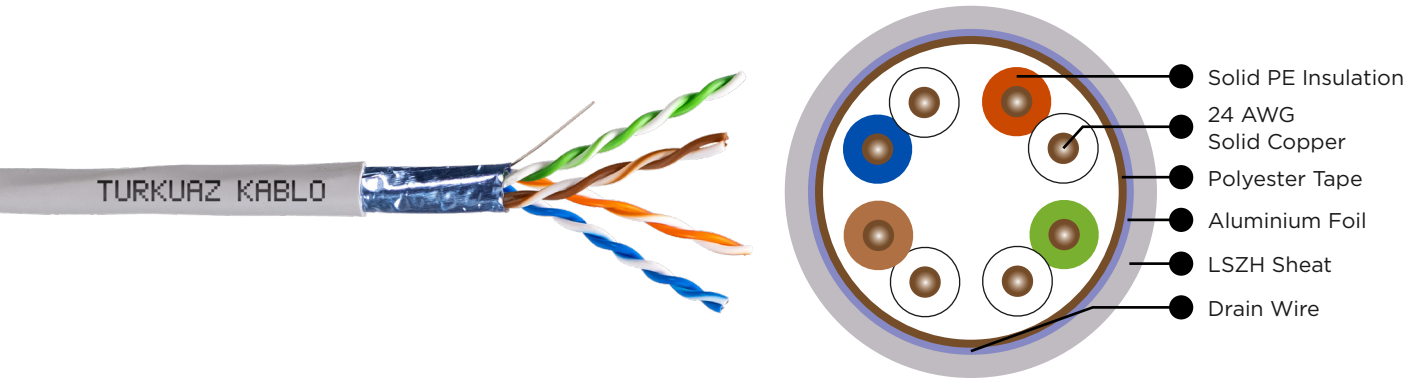

Conductor

Annealed Copper Conductor 24 AWG.

Color Code of Conductors

Blue/White-Blue; Orange/White-Orange;
Green/White-Green; Brown/White-Brown.

Insulation

Solid PE Insulation.

Shielding

Laminated Aluminium Foil and
Drain wire.

Outer Sheath

HFFR/LSZH (IEC 60332-1-2)
RAL 7035 Grey.

Stranding

Insulated wires are twisted in pairs.

Note:

Also, can be produced different colors upon on customer demand.

The Length Marking on Cable as Below:

The following designations shall be applied in a continuous row to the outer sheath so that they are clearly legible over the entire length of the cable.

TURKUAZ CABLE 2021 <CUSTOMER NAME> INDOOR CAT-5E F/UTP 24 AWG LSZH SHEATH XXXX MT

The Packing and Marking as Below:

Shipment will be done with 500 -1000 meters non-returnable non-fumigated wooden drums or 305 meters packages with protection.

The cable drums are labeled as:

- Manufacturer Name and year of Manufacturing (TURKUAZ CABLE 2021)
- Name of Customer
- CAT-5E F/UTP 24 AWG LSZH Sheath
- Gross Weightkg
- Net Weight.....kg
- Length.....meter
- Drum Numbers for each drums or package numbers for each packages.

INDOOR TYPE CAT-5E F/UTP 24 AWG LSZH SHEATH

2. APPLICATION

F/UTP Cable (Shielded Twisted Pair Cable), which is used in a horizontal or vertical configuration, it constitutes the base of voice, data, network to very high rate.

Performances of this cable exceed the current standards, its use with connectors ensure conformity with Class D channel.

So this cable is used for transmission of digital and analogue voice, data and signals. It can transmit:

- 10 BASE-T (IEEE 802.3) Ethernet
- 100 BASE-T (IEEE 802.3 U) Fast Ethernet
- 1000 BASE-T (IEEE 802.3 AB) Gigabit Ethernet
- 100 VG-AnyLAN (IEEE 802.12)
- 4/16 Mbps Token Ring (IEEE 802.5)
- Token Ring 100 Mbps
- Broadband and Baseband Video
- 100 Mbps CDDI

3. ELECTRICAL CHARACTERISTICS

Conductor Resistance Max (Ω /Km)	Insulation Resistance 500V DC (M Ω)	Mutual Capacity Max (nF/Km)	Velocity of Propagation	Dielectric Strength (V)	Impedance (Ω)
93,8	5000	56	%67-69	1000	100 \pm 15 1-100 MHz

4. MECHANICAL CHARACTERISTICS

Bending Radius (mm)	Max. Tensile Strength (N/mm)	Operating Temperature ($^{\circ}$ C)
8xD	50	-20 $^{\circ}$ C ~ +60 $^{\circ}$ C

5. STANDARDS OF CABLE

International Standards

ANSI/TIA-568-C.2
IEC-61156-5
IEC-11801

INDOOR TYPE CAT-5E F/UTP 24 AWG LSZH SHEATH

6. TRANSMISSION CHARACTERISTICS

Frequency (MHz)	Insertion Loss dB/100m (MAx)	Return Loss (RL) dB (min)	NEXT dB (Min)	PS NEXT dB (Min)	ELFEXT (ACRF) dB/100m (Min)	PS ELFEXT (PS ACRF) dB/100m (Min)	Propagation Delay ns//100m (Max)
1	2.0	20.0	65.3	62.3	63.8	60.8	570
4	4.1	23.0	56.3	52.3	51.8	48.8	552
8	5.8	24.5	51.8	48.8	45.7	42.7	547
10	6.5	25.0	50.3	47.3	43.8	40.8	545
16	8.2	25.0	47.2	44.2	39.7	36.7	543
20	9.3	25.0	45.8	42.8	37.8	34.8	542
25	10.4	24.3	44.3	41.3	35.8	32.8	541
31.25	11.7	23.6	42.9	39.9	33.9	30.9	540
62.5	17.0	21.5	38.4	35.4	27.9	24.9	539
100	22.0	20.1	35.3	32.3	23.8	20.8	538

Delay skew \leq 45ns/100m (1-100MHz.)

7. CORE IDENTIFICATION

Per Number	Conductor Diameter (mm)	Outer Diameter (mm)	Copper Weight (kg/km)	Average Weight (kg/km)	Packing/Drum Size (m)
4	0.51	5.0	14.8	30	100/305/500/1000

NOTES:

It is suitable for analog and digital signal transmission up to 100 Mbit/sec.