


**TURKUAZ  
KABLO**

# TYPE CODES OF **FIBER OPTIC CABLES**

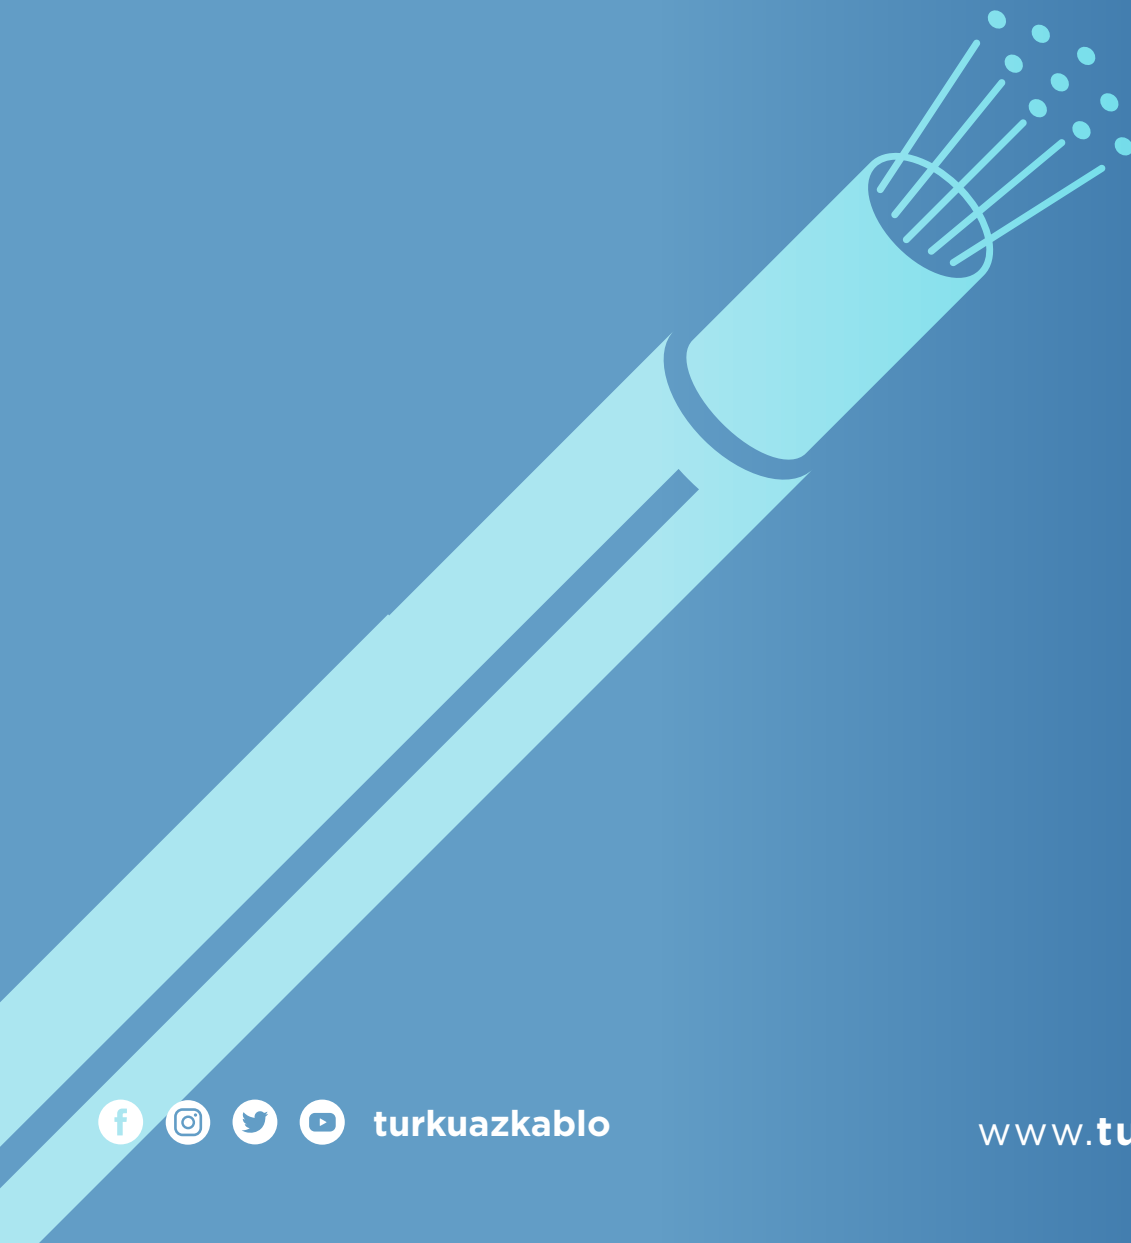

## A-BCDEFG HxI...JKLMN

| Type Codes for Optical Cables<br>DIN / VDE |   |
|--|---|
| Code                                       | Explanation of the Code   |
| A  | Outdoor Cable   |
| B  | Armoring  |
| (BN)                                       | Glass Yarn Non-metallic armoring                                    |
| D  | Loose Buffer Tube   |
| E  | Single Mode Fiber   |
| F  | Filling Compound in the cable Core                                  |
| FR   | Cable with the improved burning behavior                            |
| G  | Multi mode Fiber  |
| H  | Halogen free jacket   |
| J  | Indoor Cable  |
| K  | Slotted Core  |
| (L)  | Laminated Aluminum Sheath   |
| LG   | Stranded in Layers  |
| CT   | Central Tube construction   |
| S  | Metallic Elements in core   |
| Q  | Dry Swellable material in the cable core                            |
| (SR)                                       | Armoring by laminated corrugated longitudinal overlapped steel tape |
| (SG)                                       | Armoring by laminated smooth longitudinal overlapped steel tape     |
| Y  | Jacket or protective cover of Polyvinyl chloride (PVC)              |
| 2Y   | Jacket or protective cover of Polyethylene(PE)                      |
| 4Y   | Jacket or protective cover of Polyamide(PA)                         |
| (ZN)                                       | Non-Metallic anti buckling and strength member                      |
| (ZM)                                       | Non-Metallic anti buckling and strength member in the Jacket        |